



aerospace  
climate control  
electromechanical  
**filtration**  
fluid & gas handling  
hydraulics  
pneumatics  
process control  
sealing & shielding



# 15/40/80CN Series

## Coreless Medium Pressure Filters



ENGINEERING YOUR SUCCESS.

# 15/40/80CN Series

## Applications

- Compressor Lube Oil
- Off-line Filter Loops
- Machine Tools  
(Automotive Standard)
- Hydrostatic Drive  
Charge Pumps
- Mobile Equipment
- Pilot Lines For Servo Controls
- Oil Patch Drilling Equipment
- Injection Molding

This partial list of applications for Parker "CN" series filters has a common factor, the need for an economical, medium pressure range filter with excellent fatigue pressure ratings. Prior to the availability of the "CN" filter, applications such as those listed were restricted by limitations of a spin-on can, or forced into the higher cost range of high pressure filters.

The "CN" series fills this gap, and now with the newly increased fatigue rating from 550 to 800 psi, the applications are expanded.

### **Ecoglass III Replacement Elements**

Ecoglass III represents the merging of high performance filtration technology with environmentally conscious engineering. The Ecoglass III line of replacement elements feature 100% non-metallic construction. The design reduces solid waste and minimizes disposal costs for industry. The non-metallic construction means lightweight elements (60% less weight) for easier servicing.

The Ecoglass III elements utilize the same proprietary media design as our Microglass III line of replacement elements.


With Ecoglass III, a reusable core is installed into the filter housing and remains in service throughout the life of the assembly.



Features	Advantages	Benefits
. 800 psi fatigue rating (eight times that of a spin-on)	. Ability to provide reliable service under tough cyclic operating conditions . Can be utilized in applications where high pressure filters may have been only option	. Reduced downtime due to premature filter failures . Reduced costs, better "fit" for the application
. Diametral (side) seal between head and bowl  . Dust Seal	. Proven reliability in cyclic applications . Reduced importance of bowl torque  . Prevents contamination from building up on bowl / head threads	. No downtime, no leaks . Performs with "real world" service  . Easier service, no galling
. Cast aluminum head	. Low profile, lightweight and durable	. Less weight, smaller envelop and cleaner appearance
. Standard Ecoglass III elements	. Multi-layered design produced high capacity and efficiency . Reduces pleat bunching, keeps performance consistent	. Great performance value . Reliable performance throughout element life . Reduces downtime, maximizes element life
. Complete performance data disclosure  . Visual, electrical or electrical/visual indicators available	. All pertinent information is provided in an easy-to-compare format  . Check element condition at a glance . Right style for the application	. No hidden deficiencies . Easy selection of proper filtration  . Optimize element life, prevent bypassing . Matches your system electrical connections



# 15/40/80CN Series

## Features

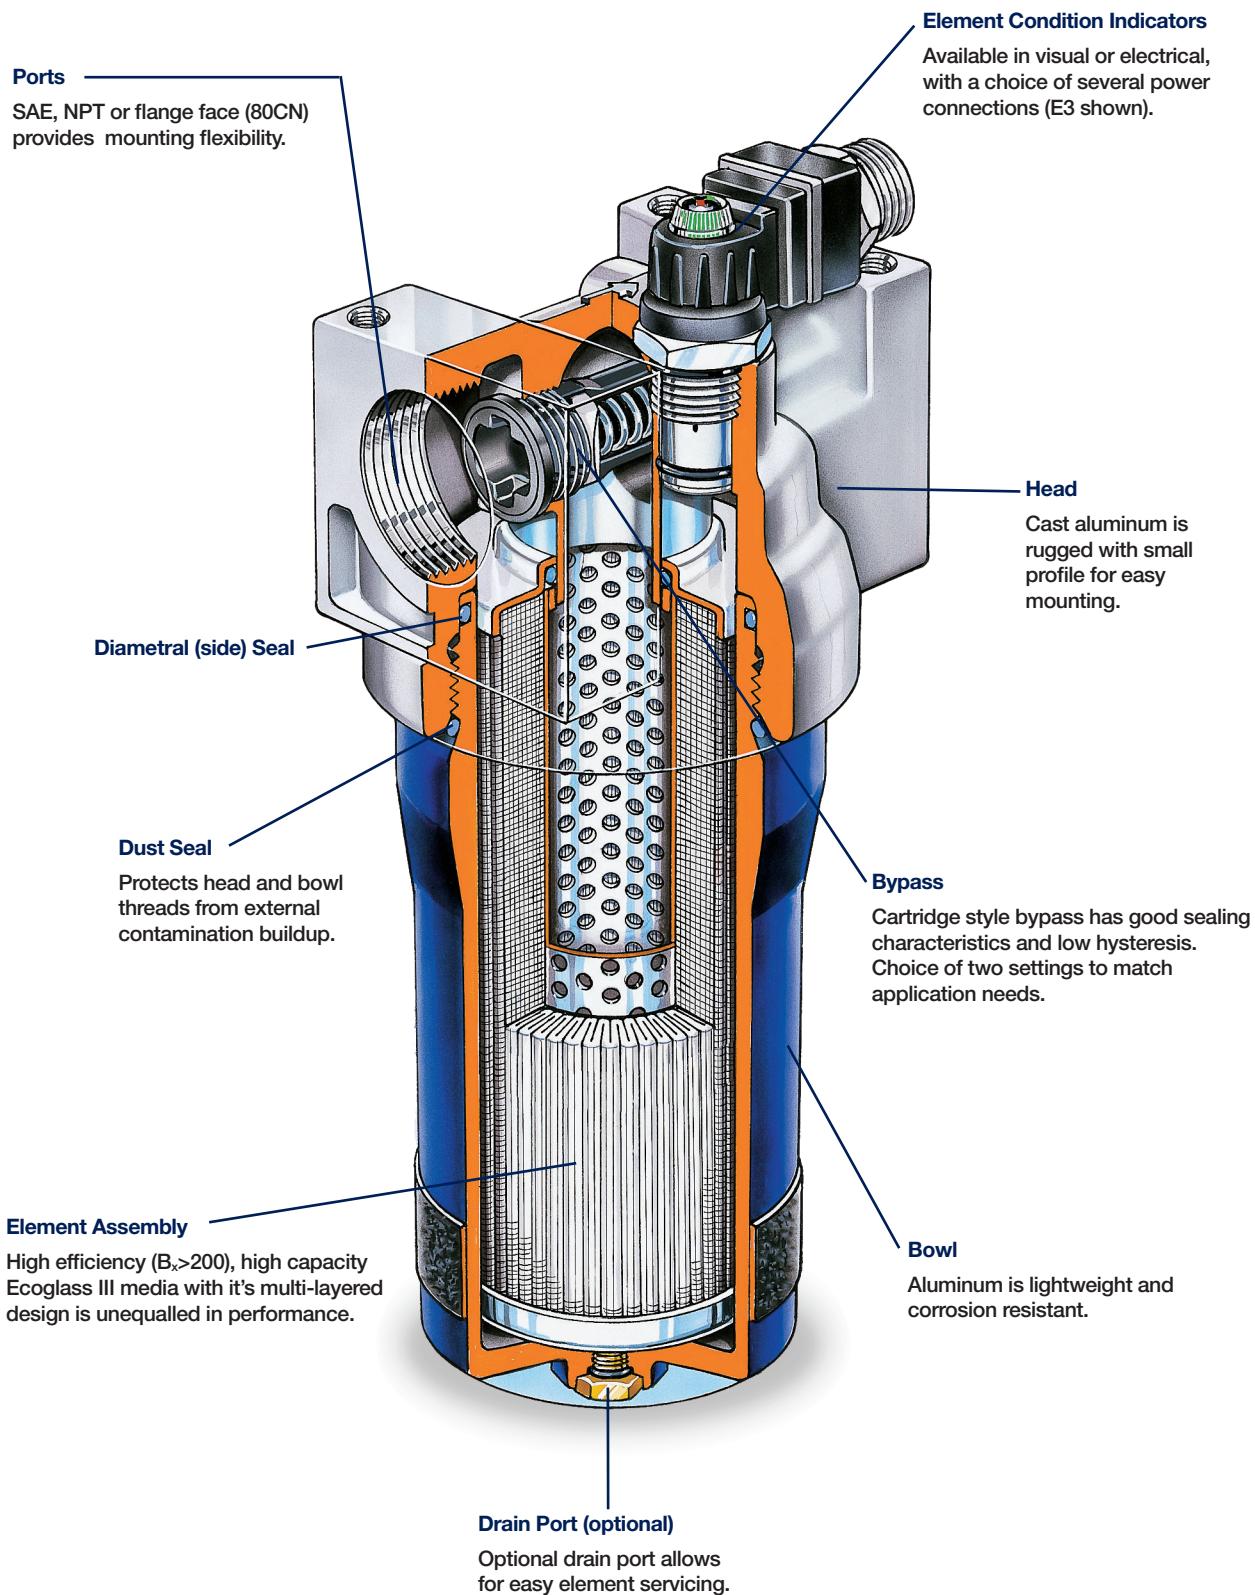


# 15CN Series

## 15CN-1 Element Performance

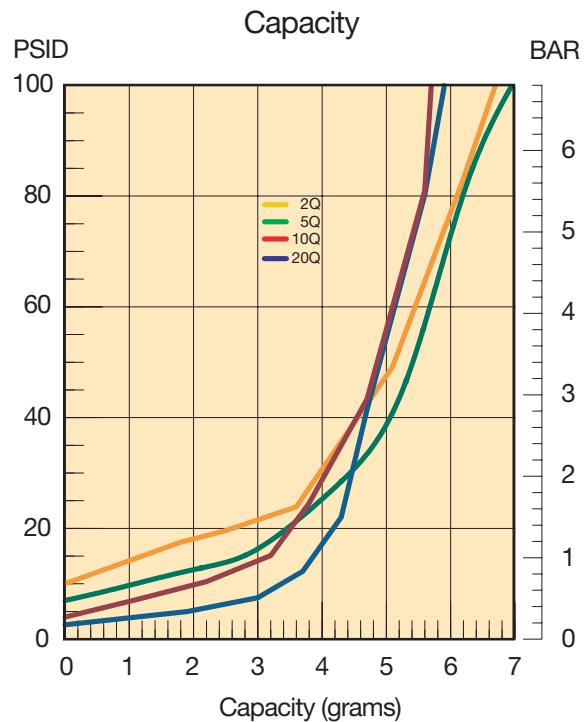
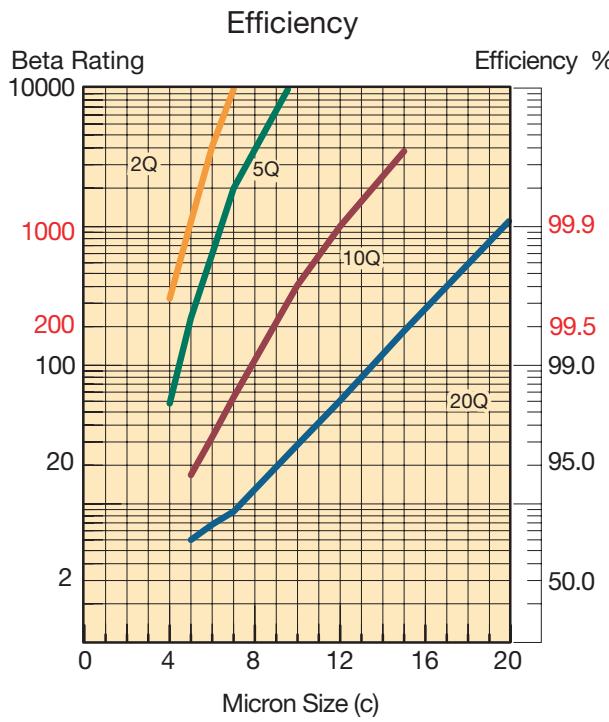


Results typical from Multi-pass tests run per test standard ISO 16889 @ 10 gpm to 100 psid terminal - 10 mg/L BUGL  
Refer to Appendix on pages 264-265 for relationship to test standard ISO 4572.

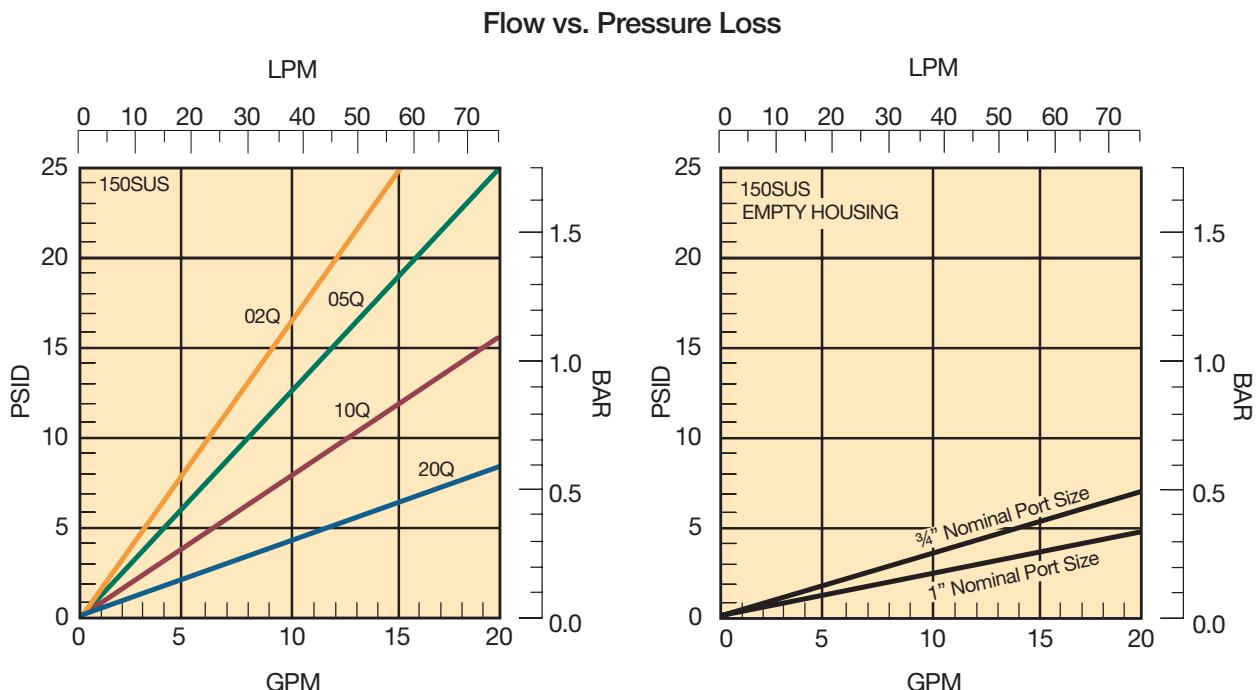



# 15CN Series

## 15CN-2 Element Performance

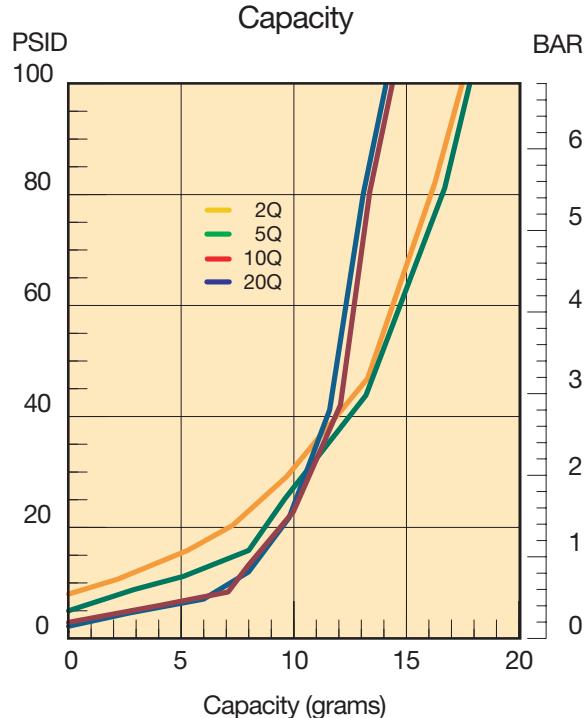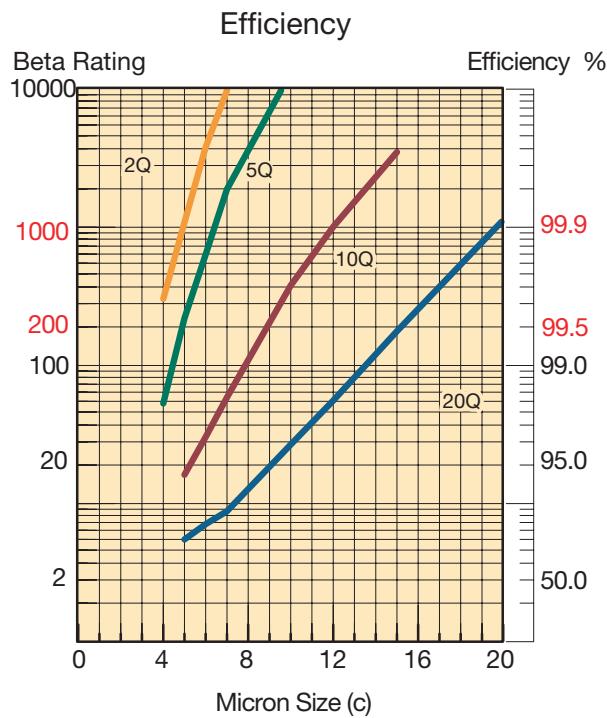


Results typical from Multi-pass tests run per test standard ISO 16889 @ 15 gpm to 100 psid terminal - 10 mg/L BUGL  
Refer to Appendix on pages 264-265 for relationship to test standard ISO 4572.

### Flow vs. Pressure Loss

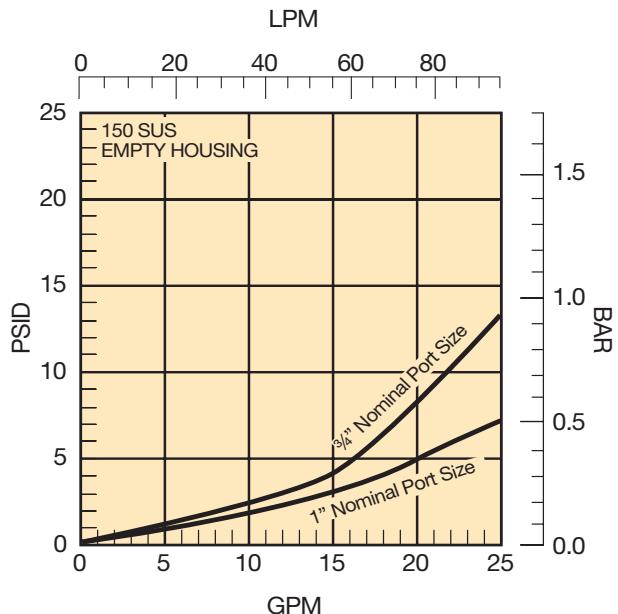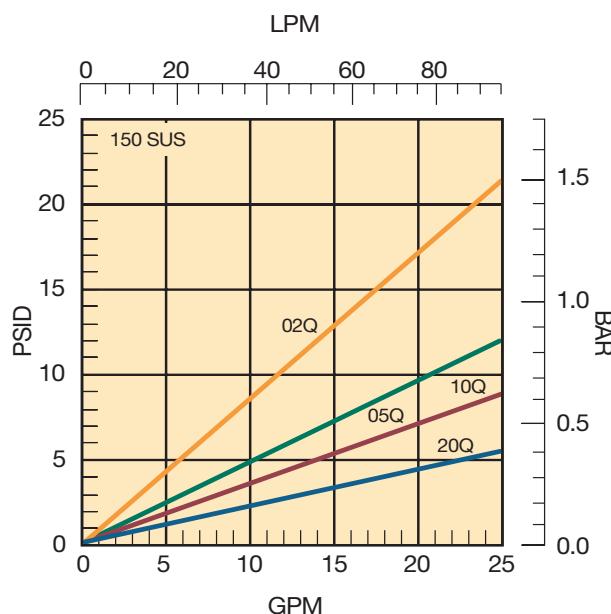


# 40CN Series

## 40CN-1 Element Performance

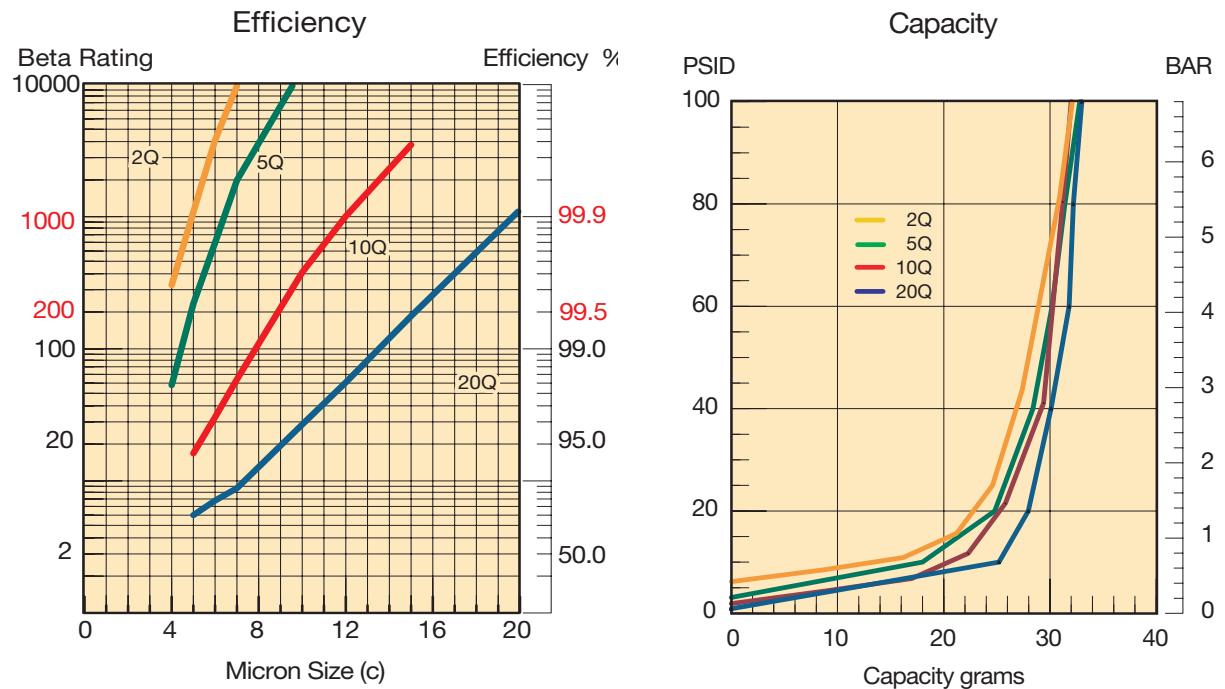


Results typical from Multi-pass tests run per test standard ISO 16889 @ 15 gpm to 100 psid terminal - 10 mg/L BUGL  
Refer to Appendix on pages 264-265 for relationship to test standard ISO 4572.

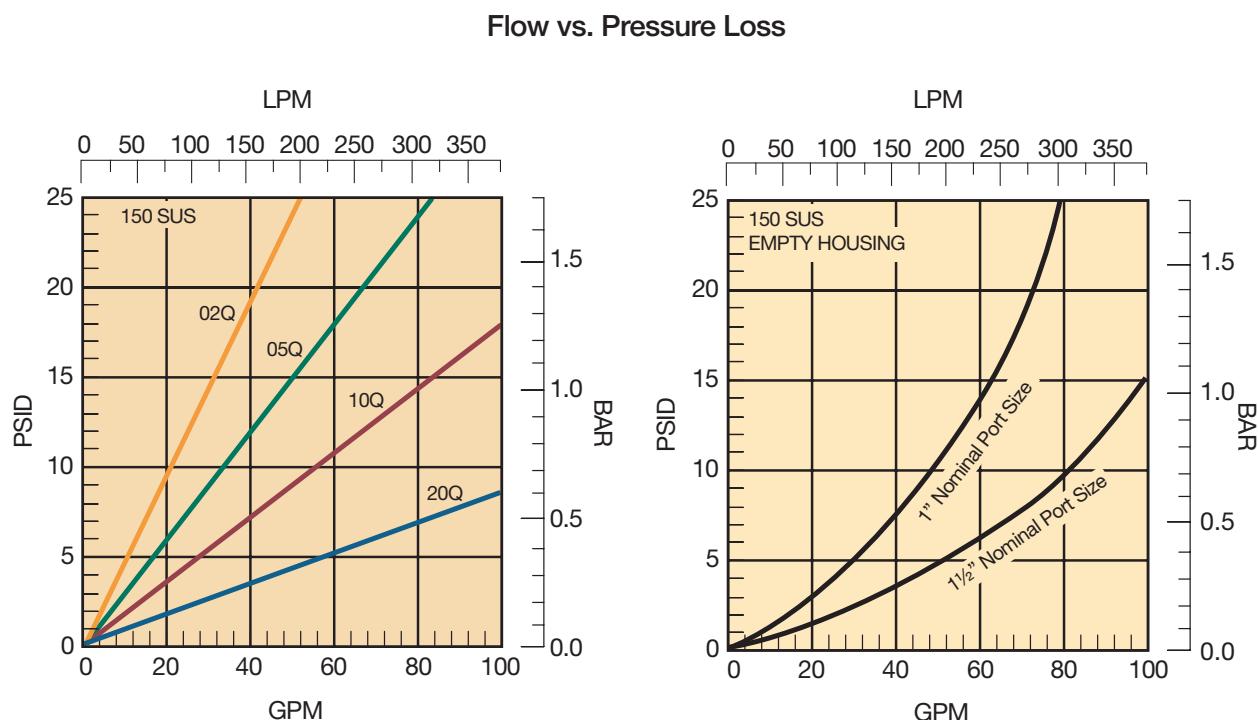


# 40CN Series

## 40CN-2 Element Performance

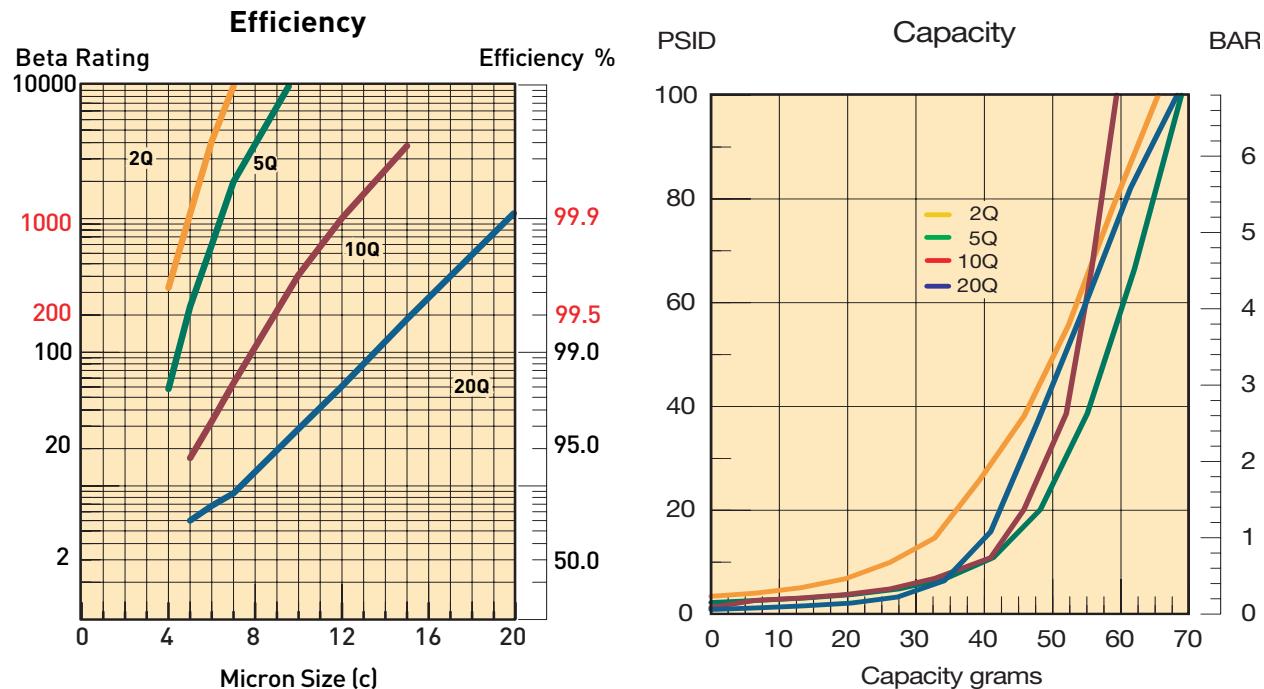


Results typical from Multi-pass tests run per test standard ISO 16889 @ 30 gpm to 100 psid terminal - 10 mg/L BUGL  
Refer to Appendix on pages 264-265 for relationship to test standard ISO 4572.

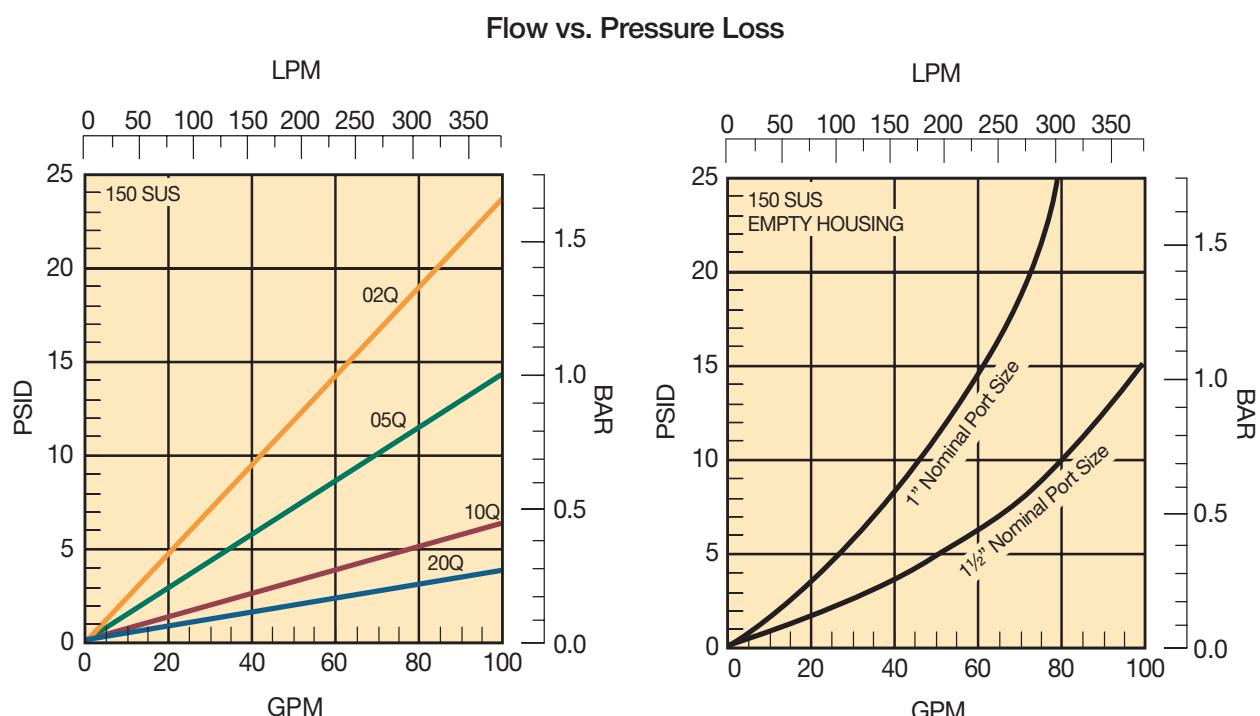



# 40CN Series

## 40CN-3 Element Performance

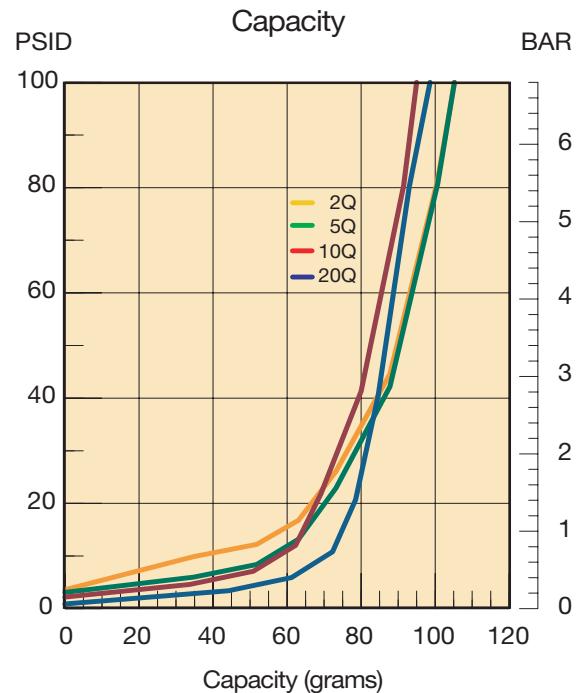



Results typical from Multi-pass tests run per test standard ISO 16889 @ 45 gpm to 100 psid terminal - 10 mg/L BUGL  
Refer to Appendix on pages 264-265 for relationship to test standard ISO 4572.

### Flow vs. Pressure Loss

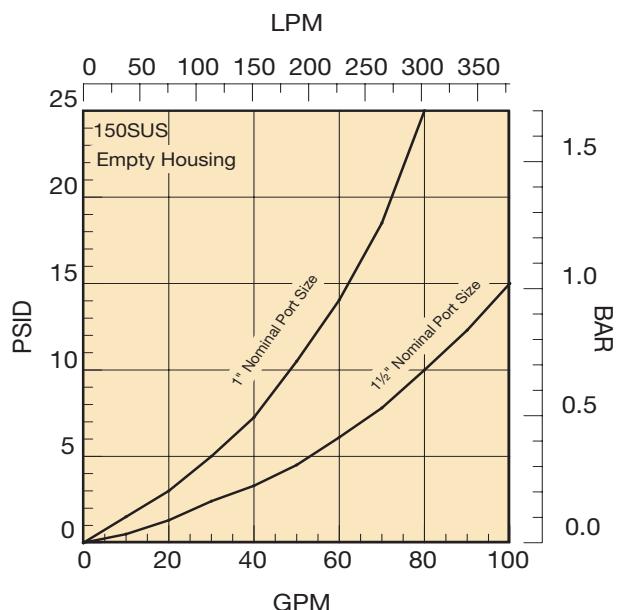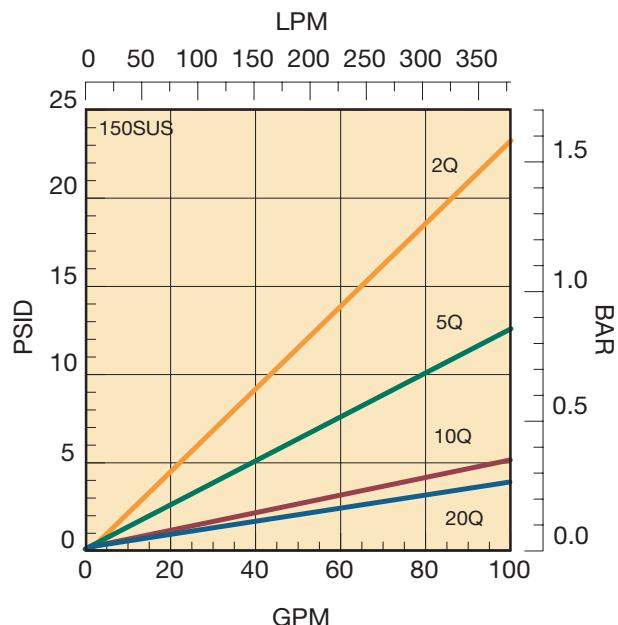


# 80CN Series

## 80CN-1 Element Performance

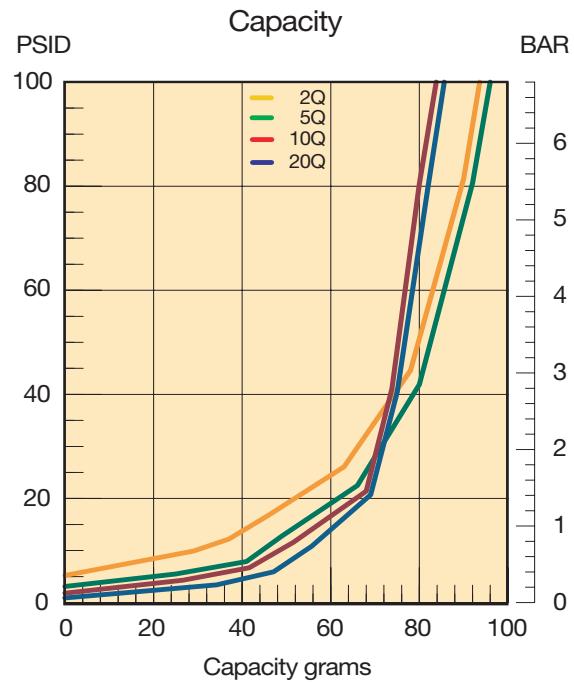
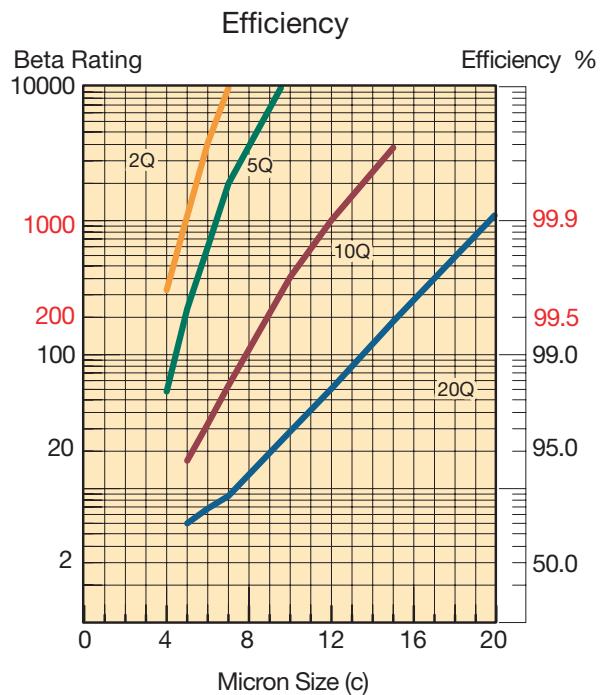


Results typical from Multi-pass tests run per test standard ISO 16889 @ 45 gpm to 100 psid terminal - 10 mg/L BUGL  
Refer to Appendix on pages 264-265 for relationship to test standard ISO 4572.

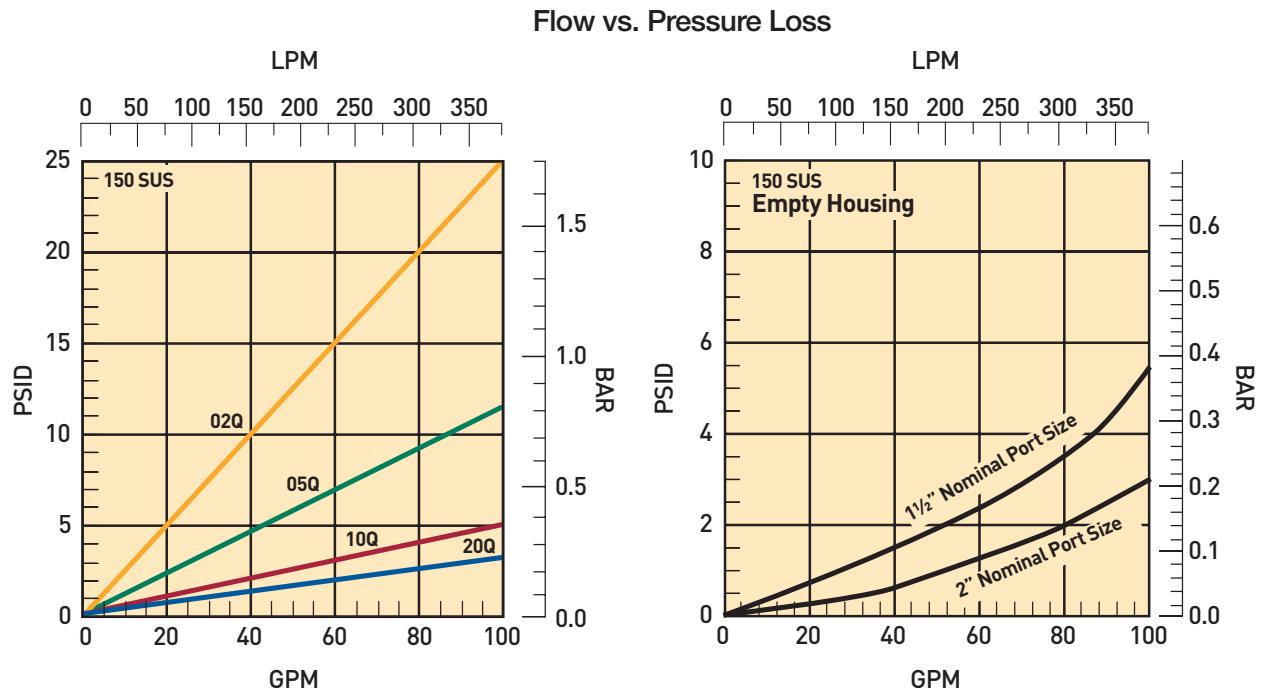



# 80CN Series

## 80CN-2 Element Performance

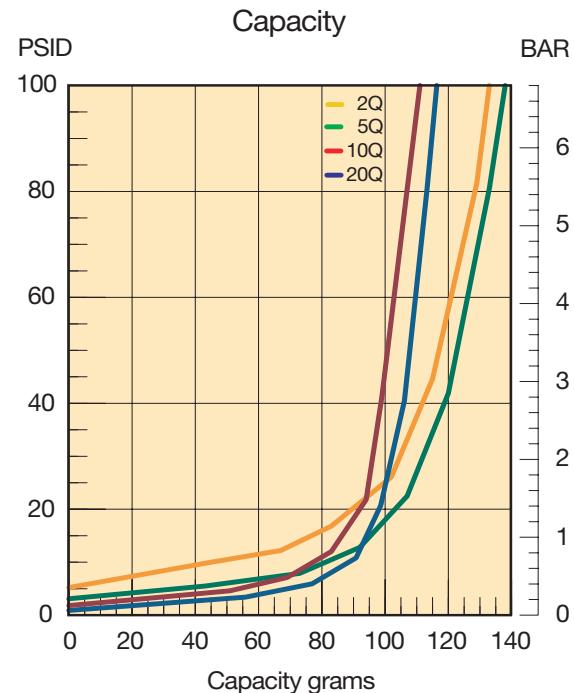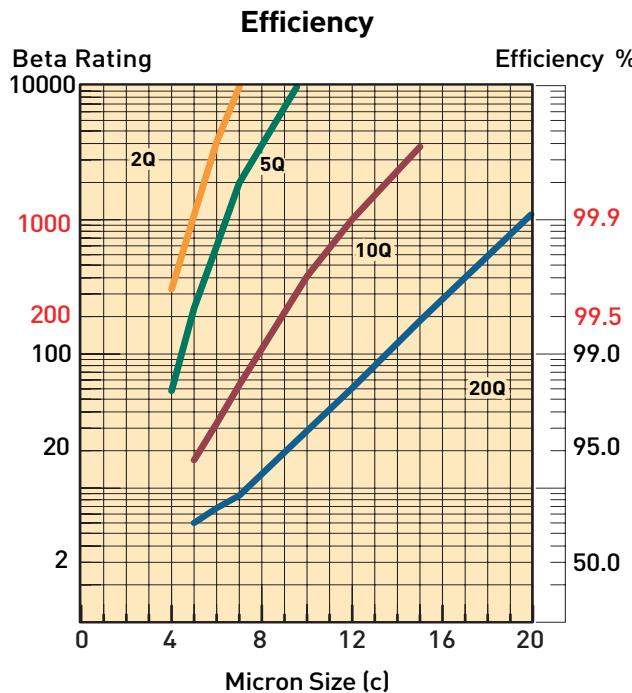

Results typical from Multi-pass tests run per test standard ISO 16889 @ 70 gpm to 100 psid terminal - 10 mg/L BUGL  
Refer to Appendix on pages 264-265 for relationship to test standard ISO 4572.

### Flow vs. Pressure Loss

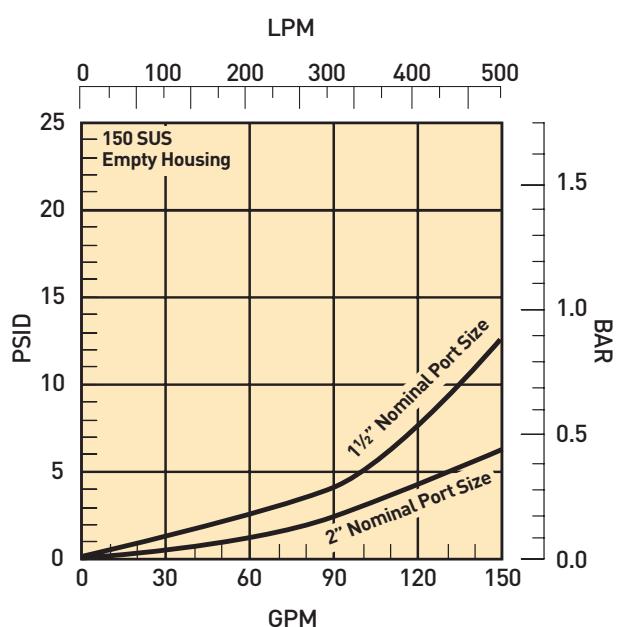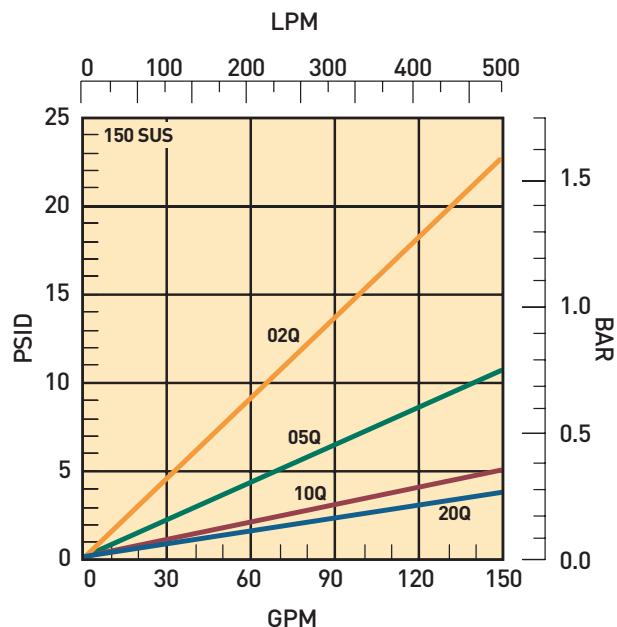

# 15/40/80CN Series

## Specifications

### Maximum Allowable Operating Pressure (MAOP):

1000 psi (69 bar)

### Rated Fatigue Pressure:

800 psi (55.2 bar)

### Design Safety Factor: 2.5:1

### Operating Temperatures:

Nitrile: -40°F (-40°C) to 225°F (107°C)

Fluorocarbon: -15°F (-26°C) to 225°F (107°C)

### Element Collapse Rating:

Standard: 150 psi (10.3 bar)

Drawings are for reference only.  
Contact factory for current version.

### Materials:

Head and Bowl: Aluminum

Indicators: Alum. body, plastic connectors

Bypass: Nylon

### Weights (approximate):

Model Single length Double length

15CN 2.5 lb. (1.13 kg) 3.5 lb. (1.6 kg)

40CN 4.5 lb. (2.00 kg) 5.5 lb. (2.49 kg)



80CN 12.4 lb. (5.62 kg) 15.2 lb. (6.89 kg)

### Element Condition Indicators:

Visual 360° green/red auto reset

Electrical/Visual

5A @ 240VAC, 3A @ 28VDC



### Electrical-Heavy Duty

.25A(resistive) MAX 5 watts

12 to 28 VDC & 110 to 175 VAC







### Color code:

White (common)

Black (normally open)

Blue (normally closed)

Dimensions are in (mm)	A	B	C	D	E	F	G	H	I	J	K	L	M
<b>15CN</b>	6.17 (156.6)	9.87 (250.7)	1.83 (46.5)	1.00 (25.4)	2.80 (71.1)	3.38 (85.9)	2.88 (73.2)	3.25 (82.6)	1.50 (88.1)	.90 (22.9)	1.69 (42.9)	1.44 (36.6)	NA
<b>40CN</b>	6.73 (170.8)	10.33 (262.4)	2.44 (62.0)	1.28 (32.6)	4.22 (107.2)	5.00 (127.0)	4.37 (111.0)	4.80 (121.9)	2.44 (62.0)	1.25 (31.8)	2.32 (58.8)	2.37 (60.2)	15.07 (382.8)
<b>80CN</b>	11.06 (280.9)	15.81 (401.6)	3.06 (77.7)	1.95 (49.5)	4.91 (124.8)	6.25 (158.7)	3.25 (82.6)	5.96 (151.4)	4.00 (101.6)	1.62 (41.1)	3.12 (79.4)	1.63 (41.3)	NA

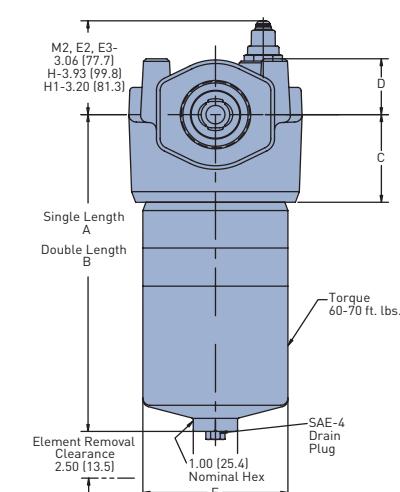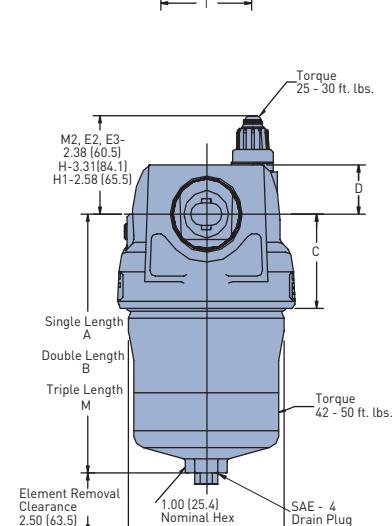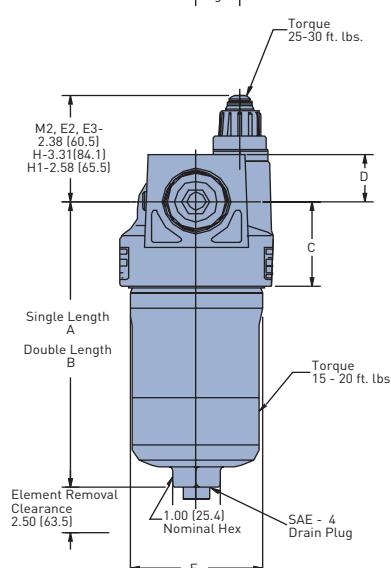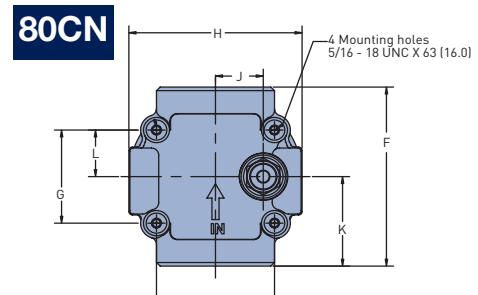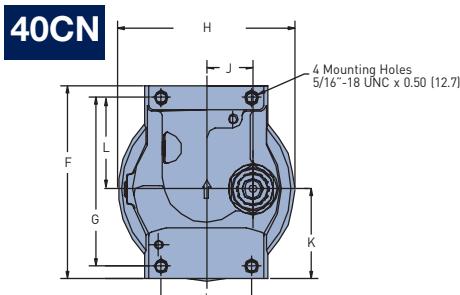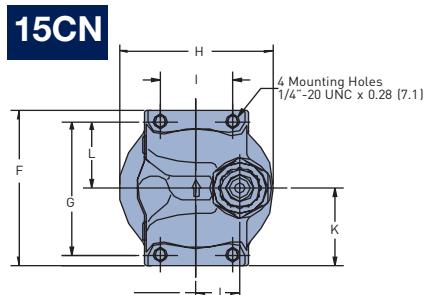

# 15/40/80CN Series

# Element Service Instructions


- A. Stop the system's power unit.
  - B. Relieve any system pressure in the filter line.
  - C. Drain the filter bowl if drain port option is provided.
  - D. Loosen and remove bowl.
  - E. Remove element by pulling downward with a slight twisting motion and discard.
  - F. Check bowl o-ring for damage and replace if necessary.
  - G. Lubricate element o-ring with system fluid and place on post in filter head.
  - H. Install bowl and tighten to specified torque.
    - 15CN - 15-20 ft. lbs
    - 40CN - 42-50 ft. lbs
    - 80CN - 60-70 ft. lbs
  - I. Confirm there are no leaks after powering the system.

15CN - 15-20 ft. lbs

40CN - 42-50 ft. lbs

**80CN - 60-70 ft. lbs**

- I. Confirm there are no leaks after powering the system.

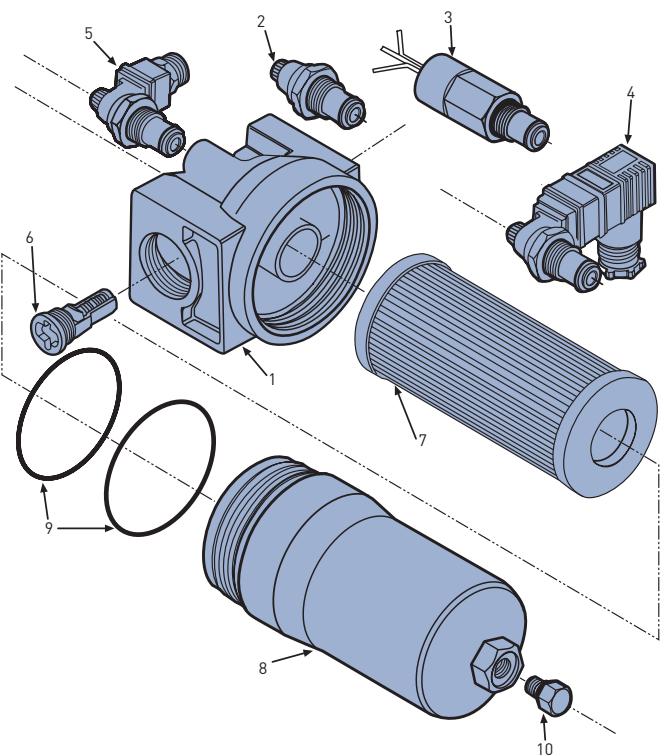

## Parts List

# 15/40/80 CN Series

## How to Order

Select the desired symbol (in the correct position) to construct a model code.  
Example:

BOX 1	BOX 2	BOX 3	BOX 4	BOX 5	BOX 6	BOX 7	BOX 8
40CN	1	10QE	B	M2	K	N24	4

BOX 1: Filter Series	
Symbol	Description
15CN	In line Filter
40CN	In line Filter
80CN	In line Filter

BOX 2: Element Length	
Symbol	Description
1	Single
2	Double
3	Triple (40CN only)

BOX 3: Media Code	
Symbol	Description
02QE	Ecoglass III, 2 micron
05QE	Ecoglass III, 5 micron
10QE	Ecoglass III, 10 micron
20QE	Ecoglass III, 20 micron

BOX 4: Seals	
Symbol	Description
B	Nitrile (NBR)
E	Ethylene propylene (EPR)
V	Fluorocarbon (FKM)

BOX 5: Indicator	
Symbol	Description
M2	Visual Automatic Reset
H	Electrical indicator with ½"-14 NPT connection and 12" leads

BOX 6: Bypass	
Symbol	Pressure Setting
G	25 PSI (1.7 bar)
K	50 PSI (3.5 bar)

BOX 7: Ports	
Symbol	Description
15CN	
N12	¾" NPT
N16	1" NPT
S12	SAE-12 straight thread
S16	SAE-16 straight thread
40CN	
N16	1" NPT
N24	1½" NPT
S16	SAE-16 straight thread
S24	SAE-24 straight thread
80CN	
N24	1½" NPT
N32	2" NPT
S24	SAE-24 straight thread
S32	SAE-32 straight thread
Y32	Flange face, SAE-2", Code 61

BOX 8: Options	
Symbol	Description
4	Standard drain port on bowl
21	No bypass and drain port

Please note the bolded options reflect standard options with a reduced lead-time. Consult factory on all other lead-time options.

### Replacement Elements (Ecoglass)

MEDIA	15CN-1	15CN-2	40CN-1	40CN-2	40CN-3	80CN-1	80CN-2
20QE	936701Q	936705Q	936709Q	936712Q	936721Q	936715Q	936719Q
10QE	936700Q	936704Q	936708Q	936601Q	936720Q	936602Q	936718Q
05QE	936699Q	936703Q	936707Q	936711Q	936623Q	936714Q	936717Q
02QE	936698Q	936702Q	936706Q	936710Q	936622Q	936713Q	936716Q

Global products as identified are offered worldwide through all Parker locations and utilize a common ordering code.

